

TEMPUS Recessed downlight

Emergency lighting



Product features

- Non-maintained operation mode
- Super slim design
- Overcharge and over-discharge protection, over-temperature protection, short circuit protection
- Status indicator
- SELV constant current output
- Open area optics

**EMERGENCY****CLASS II****50000h L70**

Applications

- Open area
- Escape route

TEMPUS Recessed downlight

Product datasheet

Emergency lighting

Product information

	Item No.	Description	Power (W)	Lumen (lm)	Light efficacy (lm/W)	CCT (K)	Beam angle (°)	Dimmable
	710480	TEMPUS Recessed DL Open area	1.8	120	67	6000	140	No
	710481	TEMPUS Recessed DL Corridor	1.8	120	67	6000	150	No

Electrical data

Max. number of luminaires per miniature circuit breaker

Item No.	THD	Inrush current I _{peak} (A)	Inrush current time (μs)	B10	B16	C10	C16	Surge protection (V)
710480	N/A	7	150	30	47	49	80	500
710481	N/A	7	150	30	47	49	80	500

TEMPUS Recessed downlight

Emergency lighting

General specifications

Electrical data	
Nominal voltage	220-240V
Frequency	50/60Hz
Power factor (PF)	0.5
Protection class	Class II
Photometric data	
CRI	RA80
UGR	N/A
Colour consistency (SDCM)	6
Photobiological safety group	RG0
Mounting & application	
Mounting method	Recessed
Loop-through	No
Driver	Integrated
IP rating	IP20
IK rating	IK02
Glow wire test	850°C
Lifetime	50000h L70B50 at 25°C
Switching cycles	100000
Operating temperature	0 to 45°C
Warranty	3 years
Materials	
Material	PC
Certificates	
Standards	

TEMPUS Recessed downlight

Product datasheet


Emergency lighting

Product dimensions & weight

Item No.	Cut-out Ø (mm)	Ø (mm)	H (mm)	Net weight (kg)
710480	36	40	23	0,16
710481	36	40	23	0,16

Master box information

Item No.	Units / master box	L (mm)	W (mm)	H (mm)	Gross weight (kg)
710480	40	380	250	180	7.2
710481	40	380	250	180	7.2

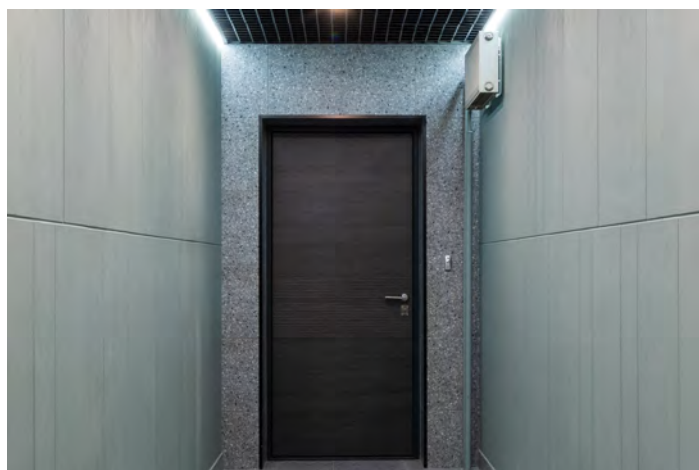

TEMPUS Recessed downlight

Product datasheet

Emergency lighting

Accessories

/											
---	--	--	--	--	--	--	--	--	--	--	--