

MEGAMAN® Emergency Kit

LA11149 (Alternative of LA11157)

Instruction Manual | Bedienungsanleitung | Manual de instrucciones | Manuale d'istruzioni | Manuel d'instructions |

Handleiding | Návod k použití



Installation video



LA11149(LA11157)

A1 A4 A5 A6

M3x5

3PCS 2 PCS 1 PCS 1 PCS

A7

1 PCS

LA11158

LiFePO4

6.4V 1.5Ah

9.6Wh 2Cell

Li-ion Battery

18650

B1

LA11157

A2 A3

M3x16

1 PCS

ST3x7

1 PCS



+LA11149

AC 230V

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

AC 230V

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

N

N

L1

L

N

N

L1

L


N

N

Max. 2A
Max. 400W



LA11149 For RENZO

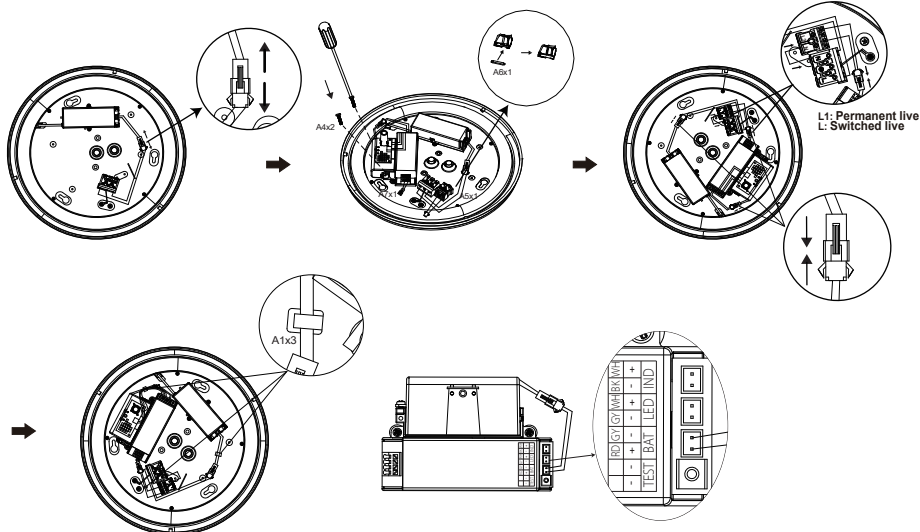

MEGAMAN®



24h 3h

0% 100%

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1

N N

N N

L1 L1


N N

N N




LA11157 For FONDA/Franco

Emergency module is available for 10W only.

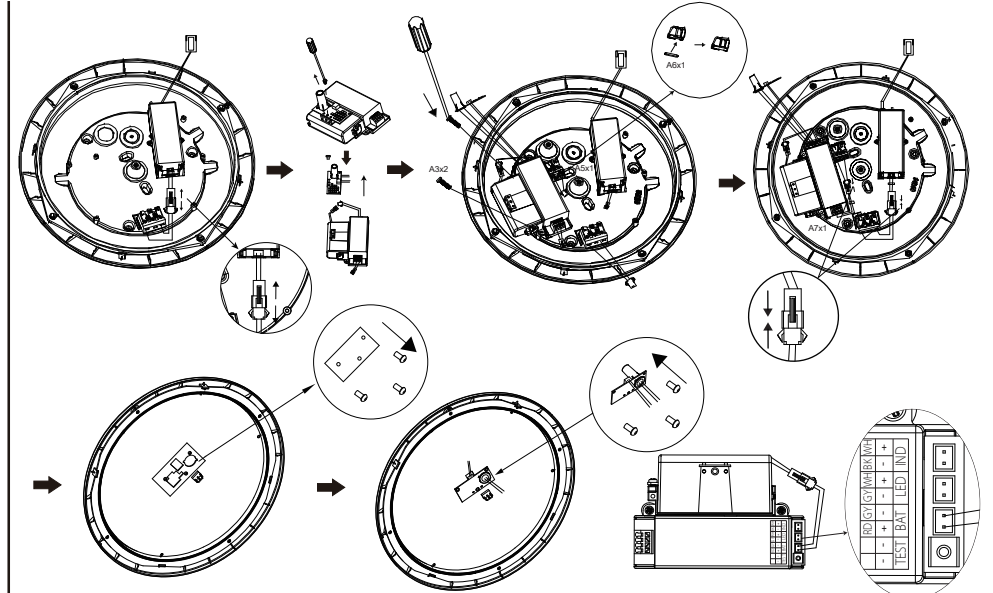

MEGAMAN®

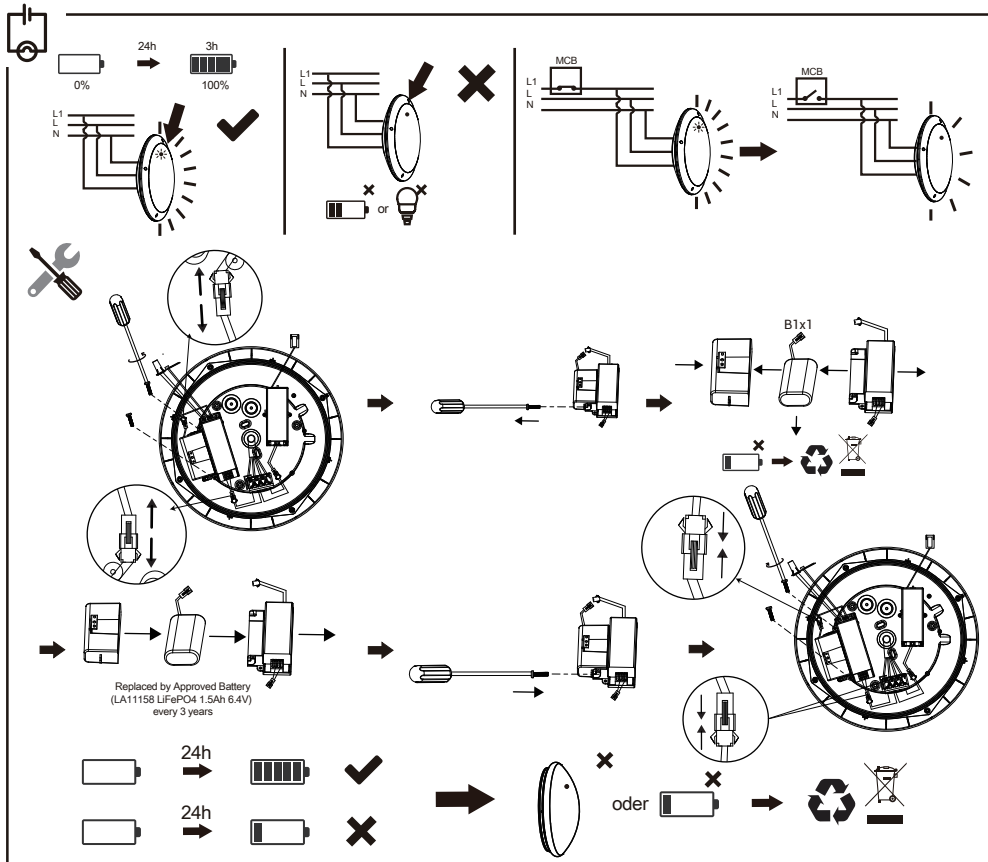

EMERGENCY LUMINAIRE TEST RECORD

INSTALLATION ENGINEERS _____ TEL _____
LUMINAIRE TYPE _____ IDENT/SERIAL No _____
LOCATION _____ INSTALLATION DATE _____

MONTH	TEST TYPE	FIRST YEAR		SECOND YEAR		THIRD YEAR		FOURTH YEAR		FIFTH YEAR	
		SIGN	DATE	SIGN	DATE	SIGN	DATE	SIGN	DATE	SIGN	DATE
1	FUNCTIONAL										
2	FUNCTIONAL										
3	FUNCTIONAL										
4	FUNCTIONAL										
5	FUNCTIONAL										
6	1 HOUR										
7	FUNCTIONAL										
8	FUNCTIONAL										
9	FUNCTIONAL										
10	FUNCTIONAL										
11	FUNCTIONAL										
12	1 HOUR										
13	FULL DURATION										

DAILY: check charge indicators are lit maintained/combined lamps illuminate; any faults are recorded
MONTHLY: in addition to the daily check - a functional test of at least 3 minutes duration to confirm lamp is working on battery power by simulating a mains failure.
SIX MONTHLY: in addition to the daily check - a functional test of at least one hour to confirm lamp is working on battery power by simulating a mains failure.
ANNUALLY: in addition to the daily check - a functional test of rated duration to confirm full operation to specification by simulating a mains failure.
A copy of this report must accompany any fitting returned to the manufacturer for any reason.



Caution – Risk of Electric Shock! Vorsicht - GEFAHR EINES STROMSCHLAGS! ATENCIÓN - RIESGO DE DESCARGA ELÉCTRICA! Attenzione - RISCHIO DI SCOSSA ELETTRICA!
ATTENTION - RISQUE DE CHOC ÉLECTRIQUE! Voorzichtig - GEVAAR VOOR EEN ELEKTRISCHE SCHOK! POZOR! - Riziko úrazu elektrickým proudem.
The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
Das in dieser Leuchte enthaltene Leuchtmittel darf nur durch den Hersteller, seinen Kundendienst oder entsprechend qualifiziertes Fachpersonal ausgetauscht werden.
La fuente de iluminación de esta luminaria solo debe ser sustituida por el fabricante o su agente de servicio, o en su caso, por personal cualificado.
La sorgente luminosa contenuta in questo apparecchio deve essere sostituita esclusivamente dal produttore, dal suo rappresentante o da una persona similmente qualificata.
La source lumineuse contenue dans ce luminaire ne doit être remplacée que par le fabricant ou son agent de maintenance ou une personne de qualification équivalente.
De lichtbron in deze lamp mag alleen worden vervangen door de fabrikant, zijn serviceagent of een vergelijkbaar gekwalificeerd persoon.
Zdroj světla v tomto svítidle smí být vyměněn pouze elektrikářem, nebo servisním agentem výrobce.

	P	I	λ	Ta	Emergency lumen (lm)
LA11149	4W	Max.55mA	0.35	0°C ~ +45°C	300
LA11158	N/A	N/A	N/A	0°C ~ +60°C	N/A
LA11157	4W	Max.55mA	0.35	0°C ~ +45°C	300

Note: 1. After the main circuit is powered off, the photometric data in the emergency mode reaches 300 lm within 5 s.
2. The battery is replaceable, and the replacement of the battery is needed when they no longer meet their rated duration of operation after the corresponding recharge period.