


Instruction Manual | Bedienungsanleitung | Manual de instrucciones | Manuale d'istruzioni | Manuel d'instructions |
Handleiding | Návod k použití




Sensor Kit

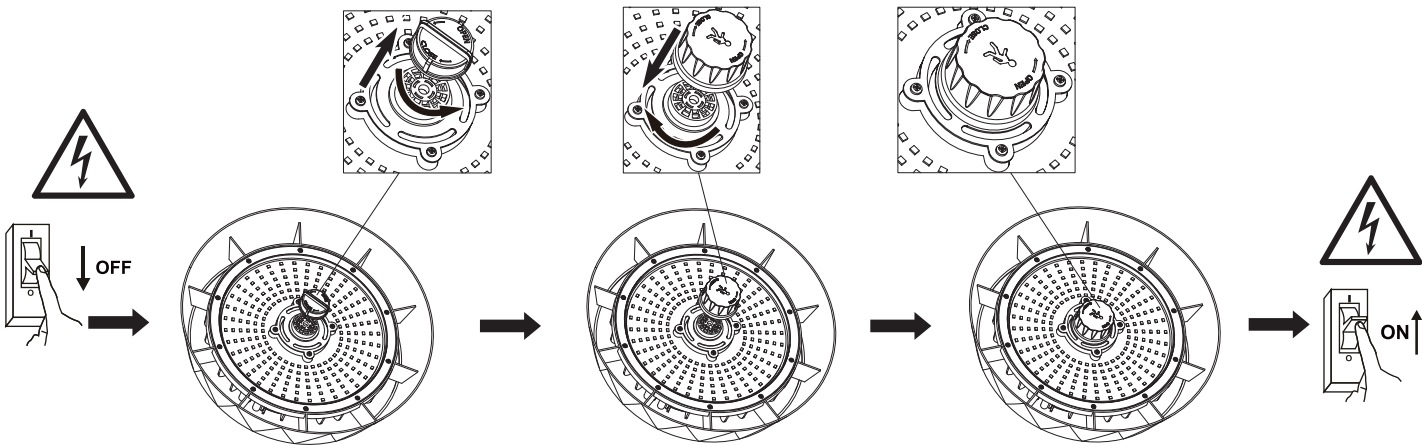

Detection coverage

Typical installation height 8-12m.
This figure indicates the maximum distance at the highest mounting height with 100% sensitivity.

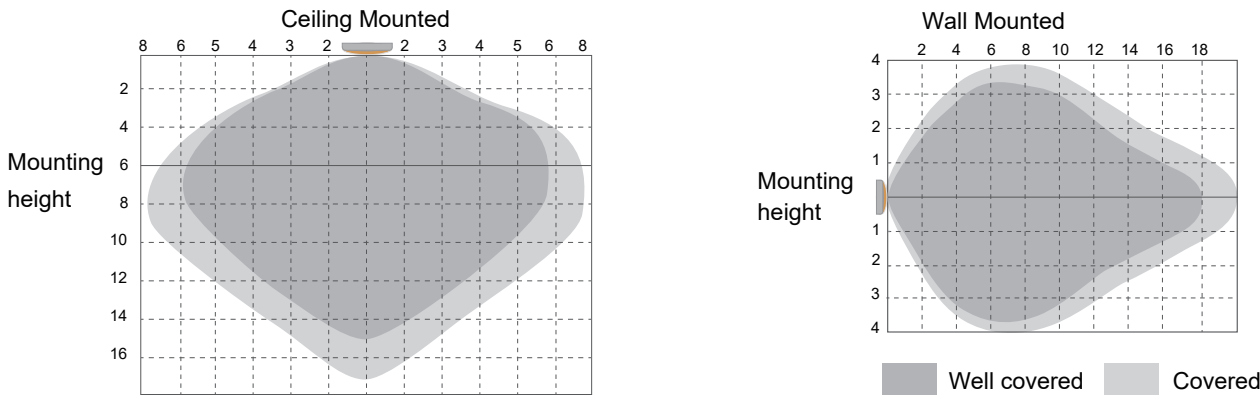

Caution – Risk of Electric Shock! **Vorsicht - GEFAHR EINES STROMSCHLAGS!** **ATENCIÓN - RIESGO DE DESCARGA ELÉCTRICA!** **Attenzione - RISCHIO DI SCOSSA ELETTRICA!**
ATTENTION - RISQUE DE CHOC ÉLECTRIQUE! **Voorzichtig - GEVAAR VOOR EEN ELEKTRISCHE SCHOK!** **POZOR! - Riziko úrazu elektrickým proudem.**

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
Das in dieser Leuchte enthaltene Leuchtmittel darf nur durch den Hersteller, seinen Kundendienst oder entsprechend qualifiziertes Fachpersonal ausgetauscht werden.
La fuente de iluminación de esta luminaria solo debe ser sustituida por el fabricante o su agente de servicio, o en su caso, por personal cualificado.
La sorgente luminosa contenuta in questo apparecchio deve essere sostituita esclusivamente dal produttore, dal suo rappresentante o da una persona similmente qualificata.
La source lumineuse contenue dans ce luminaire ne doit être remplacée que par le fabricant ou son agent de maintenance ou une personne de qualification équivalente.
De lichtbron in deze lamp mag alleen worden vervangen door de fabrikant, zijn serviceagent of een vergelijkbaar gekwalificeerd persoon.
Zdroj světla v tomto svítidle smí být vyměněn pouze elektrikářem, nebo servisním agentem výrobce.



Specification

Input	Voltage	10.5-15V DC (Current Required>30mA)
	Standby Consumption	<30mA (Power Consumption)
Output	Dim Output	DIM 1-10V
Daylight Priority Function		Detection area: 120Lux/80Lux/50Lux/30Lux Stand-by period: +∞ Stand-by dimming level: 10%/20%/30%
Sensor Parameters	Detection Area	25%/50%/75%/100%
	Holdtime	5s/30s/1min/3min/5min/10min/20min/30min
	Daylight Threshold	2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/Disable
	Stand-by Period	0s/10s/30s/1min/5min/10min/30min/60min+∞
	Stand-by Dimming Level	10%/20%/30%/50%
	Microwave Frequency	5.8GHz±75MHz
	Microwave Power	<0.3mW
	Mounting Height	≤12m/39.36ft (Ceiling Mounted)
	Detection Range	Max,ø16m/52.49ft (Ceiling Mounted)
	Motion Detection	0.5~1m/s
Others	Temperature	-20°C~+60°C
	IP Grade	IP65
	Warranty	5 Years
Remark	Factory Default Setting: Detection area 100%/ Hold time 5s/ Daylight threshold Disable/ Stand-by period 0s/Stand-by dimming level 10%. For details about how to set parameters, see HD05R.	

	P	I			
LA11201	0.36W	30mA	Φ (mm) 48.2	H (mm) 31.3	

